

## NEVRAS Multi-Apartment Video Door Phone Systems

NEVRAS intelligent building video intercom system is designed for large residential communities.

A third generation intelligent building video intercom system which uses differential signal and CAT5E (HSYV) transmission technology.

System characteristics includes a simple system structure saving installation time, clear audio and video providing high quality communication and elegant and stylish design.

### Outdoor Station

#### Product Code : NEV-NMAS-OUT001

##### Features:

- Alloy die-casting panel.
- Touch-pressure type buttons, and illuminated keyboard
- IC/ID card unlock, IC/ID card can be managed by door station.
- Supports unlock buttons, compatible with all kinds of locks.
- Unlock by password, support set personal password by indoor monitors, or set public password by outdoor station.
- LCD display.

##### Specifications:

- Operating power: 18V-36V
- Power Consumption: 200mA (normal), 50mA (standby)
- TFT Resolution: 128 \* 64
- Camera image sensor: 1/4" CCD Colour with night vision
- Camera viewing angle: 56 degrees
- Connection: CAT 5
- Installation method: Semi/Flush mounting, comes with mounting back shell for recessing
- Electronic lock: 12V
- Magnetic locks: DC12V, 350mA
- Supports ID/IC Card unlocking
- Support up to 9,999 subscribers
- Operating temperature: -30 °~+ 60°
- Dimension: 230\*320\*56mm





security products

www.nevras.com.au

'protecting your premises'  
from unwanted intruders with our  
Multi Apartment Video Door Phone Systems

Sales/Support - 1300NEVRAS

- ACCESS CONTROL SYSTEMS - BUILDING INTERCOMS - CCTV SURVEILLANCE SYSTEMS - SECURITY ALARM SYSTEMS - VIDEO DOOR PHONES -

## Outdoor Station

**Product Code : NEV-NMAS-OUT002**

### Features:

- Alloy die-casting panel.
- Touch-pressure type buttons, and illuminated keyboard
- Supports unlock buttons, compatible with all kinds of locks.
- Unlock by password, support set personal password by indoor monitors, or set public password by outdoor station.
- Waterproof

### Specifications:

- Operating power: 18V-36V (4W/1.5W)
- LCD: STN 128 \* 64
- Camera image sensor: 1/4" CCD Colour with night vision
- Camera viewing angle: 56 degrees
- Connection: CAT 5
- Installation method: Surface mounting
- Electronic lock: 12V
- Support up to 9,999 subscribers
- Operating temperature: -20 °~+ 60°
- Dimension: 298\*138\*55mm



## Super Slim Video Door Phone

**Product Code : NEV-VIDINT-008**

### Indoor Monitor - Specifications:

- 7" Colour Digital LCD 800\*480
- 7 Touch key operation
- Hand free video intercom design
- Installation method is surface-mounted
- 4-wire connection
- Supports Lock control
- Supports 2 outdoor stations
- Supports 2 CCTV cameras
- Supports up to 3 indoor stations
- 12 chord ring tones
- Brightness contrast and colour adjustable
- Real-time monitoring to doorbell or CCTV camera
- Monitor listening to another monitor
- Make internal call to other monitors
- Working voltage: DC15V , 1Amax
- Dimensions: 185\*127\*17mm
- Available in Black and White



**ITS Security & SURVEILLANCE - ABN : 12 578 029 601**

PO Box 32 - MENTONE VIC 3194 - mobile : 0416 158 528 - phone a/h : 9587 4087 - fax : 03 9587 4081 - www.its.com.au - its@its.com.au

### Power Supply NEV-PW-01

#### Features:

- Supply power for apartment system
- Allows for backup power control
- Use CAT-5 Cable for Connection
- Easy System Layout

#### Specifications:

- AC Input: 100-240V, 50Hz/60Hz
- DC Output: 36V/1.5A
- Support indoor monitor quantity: 36
- Interface mode: RJ45/CAT-5
- Operating temperature: -30 °~+ 60°
- Battery Charge Out: 27.6V/0.5A
- Installation method: Surface mounting
- Dimension: 145×90×72mm



### Vertical Distributor NEV-NV-01

#### Features:

- Install at floors
- Support 4 subscribers
- Use CAT-5 Cable for Connection
- Easy System Layout
- Connect 4 indoor stations

#### Specifications:

- Power: 18-36V DC/0.8W
- Interface mode: RJ45/CAT-5
- Supports 4 indoor monitors
- Operating temperature: -30 °~+ 60°
- Communication mode: CAN bus
- Installation method: Surface mounting
- Dimension: 145×90×40mm




### Horizontal Distributor NEV-NH-01

#### Features:

- Required for building to building installation
- Connect between doorbell to system
- Transfer signal to different apartment units
- Use CAT-5 Cable for Connection
- Easy System Layout
- Can support up to 8 outdoor panels

#### Specifications:

- Power: 18-36V DC/1W
- Interface mode: RJ45/CAT-5
- Support outdoor panel quantity: 2
- Horizontal networking distance (max): 1KM
- Horizontal networking quantity (max): 99
- Operating temperature: -30 °~+ 60°
- Communication mode: CAN bus
- Installation method: Surface mounting
- Dimension: 145×90×40mm

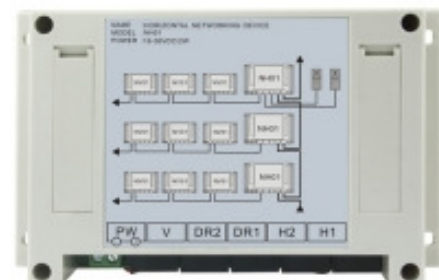

### RJ45 Converter NEV-NC01

#### Features:

- Provides conversion interface between the vertical distributor and indoor monitor
- Power input: DC18- 36V / 0. 5A
- Power output: DC15V / 0.6A
- Dimension: 46\*27\*20mm

